



MONOCRYSTALLINE SINGLE GLASS 395-420W REESUN108H-182M

**High efficiency and low LID
PERC monocrystalline technology
HALF-CELL technology**



-  Excellent Anti-PID performance
-  Guaranteed power tolerance (0 ~+5W)
-  Excellent wind and snow loads up to 5400Pa under specific installation methods
-  Lower current, higher power generation, lower risk of hot spots
-  Excellent low irradiation performance
-  Higher component conversion efficiency (up to 21.51%)
-  12-year product quality warranty, 25-year linear output power warranty

Comprehensive Product And System Certification

IEC 61215, IEC 61730

ISO 9001:2015: ISO Quality Management System Certification

ISO 14001:2015: ISO Environmental management system certification

ISO 45001:2018 Occupational Health and Safety Management System Certification



*Reesun Solar reserves the right to interpret technical changes and test specifications.



REESUN108H-182M 395-420W

Electrical Performance Parameters

Maximum power test tolerance : $\pm 3\%$


Component model	395W		400W		405W		410W		415W		420W	
Testing environment	STC	NOCT										
Maximum power [Pmax/W]	395	298	400	302	405	306	410	310	415	314	420	318
Maximum power voltage [Vmpp/V]	30.84	34.75	31.02	34.88	31.23	35.12	31.45	35.23	31.64	35.37	31.82	35.50
Maximum power current [Imp/A]	12.81	29.08	12.90	29.26	12.97	29.47	13.04	29.72	13.12	29.89	13.20	30.09
Open circuit voltage [Voc/V]	36.98	10.96	37.07	11.03	37.19	11.10	37.32	11.16	37.45	11.22	37.58	11.29
Short circuit current [Isc/A]	13.70	10.25	13.79	10.32	13.87	10.38	13.95	10.43	14.02	10.50	14.10	10.57
Component efficiency [%]	20.23		20.48		20.74		21.00		21.25		21.51	

Maximum power test Common Standard Test Environment (STC) irradiance 1000W/m², atmospheric quality AM1.5, module temperature 25 °C

Nominal operating battery temperature (NOCT): irradiance 800W/m², ambient temperature 20 °C, atmospheric quality AM1.5, wind speed 1m/s

Mechanical And Operating Parameters

Number of battery cells	108(6×18)
Junction box	IP68 Three diodes
Output cable	4mm ² , length 300mm, Customizable length
Glass	3.2mm Single layer coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	21.5kg±3%
Size	1722×1134×35mm
Packing	31pcs per pallet 806pcs per 40'HC
Working temperature	-40°C ~ +85°C
Power tolerance	0~+5 W
Current and voltage tolerance	±4%/±3%
Maximum system voltage	DC1500V (IEC)
Maximum fuse current rating	25A
Nominal operating battery temperature	45±2°C
Safety level	Class II
Fire rating	Class C

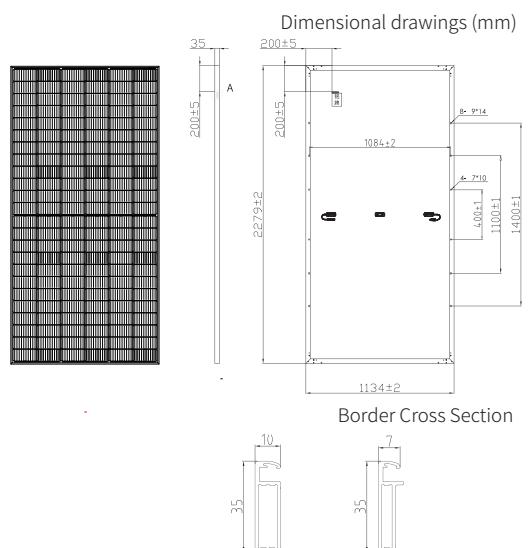

Temperature Coefficient(STC)

Mechanical Load

Short circuit current temperature coefficient of frame section	+0.048%/°C	Front maximum static load	5400Pa
Open circuit voltage temperature coefficient	-0.270%/°C	Maximum back static load	2400Pa
Maximum power temperature coefficient	-0.350%/°C	Hail test	25mm hail, impact at 23 m/s

I-V Curve (REESUN108H-182M-410W)

