



# MONOCRYSTALLINE SINGLE GLASS 530-555W REESUN110H-210M

High efficiency and low LID  
PERC monocrystalline technology  
HALF-CELL technology

-  Excellent Anti-PID performance
-  Guaranteed power tolerance (0 ~+5W)
-  Excellent wind and snow loads up to 5400Pa under specific installation methods
-  Lower current, higher power generation, lower risk of hot spots
-  Excellent low irradiation performance
-  Higher component conversion efficiency (up to 21.13%)
-  12-year product quality warranty, 25-year linear output power warranty


## Comprehensive Product And System Certification

IEC 61215, IEC 61730

ISO 9001:2015: ISO Quality Management System Certification

ISO 14001:2015: ISO Environmental management system certification

ISO 45001:2018 Occupational Health and Safety Management System Certification

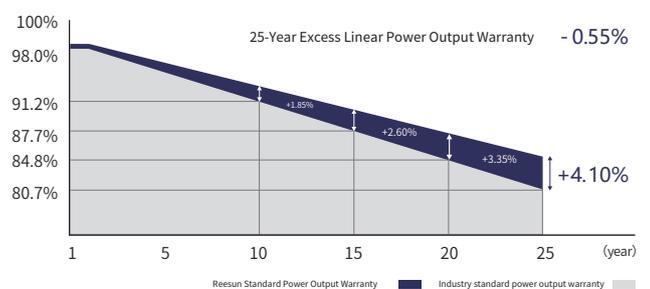

\*Reesun Solar reserves the right to interpret technical changes and test specifications.

# REESUN110H-210M 530-555W

## Electrical Performance Parameters


Maximum power test tolerance :  $\pm 3\%$

Component model	530W		535W		540W		545W		550W		555W	
	STC	NOCT										
Testing environment	STC	NOCT										
Maximum power [Pmax/W]	530	401	535	405	540	409	545	412	550	416	555	420
Maximum power voltage [Vmp/V]	31.06	28.82	31.26	29.01	31.46	29.19	31.66	29.38	31.86	29.57	32.05	29.77
Maximum power current [Imp/A]	17.07	13.93	17.12	13.97	17.17	14.01	17.22	14.05	17.27	14.09	17.32	14.13
Open circuit voltage [Voc/V]	37.38	34.76	37.58	34.95	37.78	35.14	38.02	35.36	38.24	35.56	38.44	35.76
Short circuit current [Isc/A]	18.08	14.83	18.13	14.87	18.18	14.91	18.23	14.95	18.28	14.99	18.33	15.03
Component efficiency [%]	20.17		20.36		20.55		20.74		20.94		21.13	

Maximum power test Common Standard Test Environment (STC) irradiance 1000W/m<sup>2</sup>, atmospheric quality AM1.5, module temperature 25 °C  
 Nominal operating battery temperature (NOCT): irradiance 800W/m<sup>2</sup>, ambient temperature 20 °C, atmospheric quality AM1.5, wind speed 1m/s

## Mechanical And Operating Parameters

Number of battery cells	110(5×22)
Junction box	IP68 Three diodes
Output cable	4mm <sup>2</sup> , length 300mm, Customizable length
Glass	3.2mm Single layer coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	28.5kg $\pm 3\%$
Size	2384×1102×35mm
Packing	31pcs per pallet 496pcs per 40'HC
Working temperature	-40°C ~ +85°C
Power tolerance	0~+5 W
Current and voltage tolerance	$\pm 4\%/\pm 3\%$
Maximum system voltage	DC1500V (IEC)
Maximum fuse current rating	30A
Nominal operating battery temperature	45 $\pm 2$ °C
Safety level	Class II
Fire rating	Class C

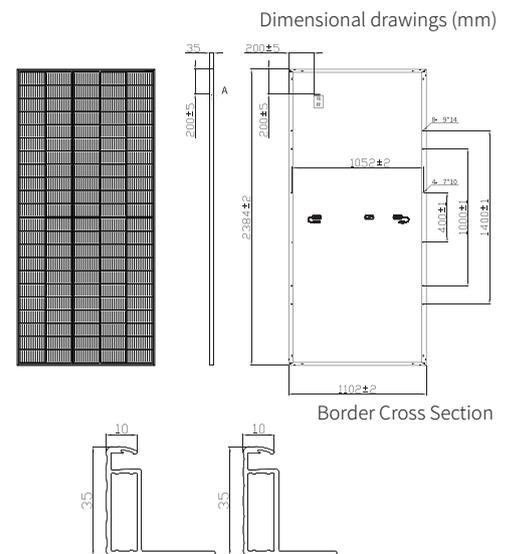

## Temperature Coefficient(STC)

Short circuit current temperature coefficient of frame section	+0.048%/°C
Open circuit voltage temperature coefficient	-0.270%/°C
Maximum power temperature coefficient	-0.350%/°C

## Mechanical Load

Front maximum static load	5400Pa
Maximum back static load	2400Pa
Hail test	25mm hail, impact at 23 m/s

## I-V Curve (REESUN110H-210M-550W)

